


# 32 CHANNEL DIGITAL VIDEO RECORDER

**ALL IN ONE**  
(IP-TVI-CVI-AHD-960H)

GSD-DVRFNC-32

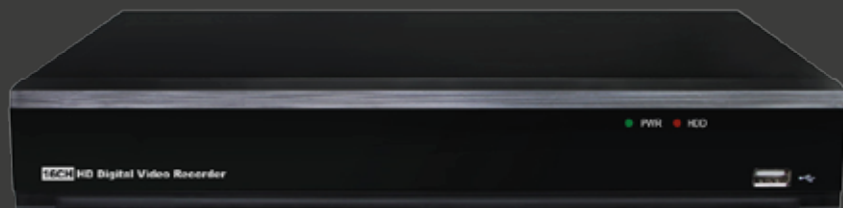

UP TO 4MP RESOLUTION | UP TO 8 HDD SLOT | ONVIF ENCODER MODE

AUTO-DETECT BNC | EASY P2P SERVER | HDMI 4K - VGA - SPOT OUTPUT | FREE CMS PC & MAC

2U RACKMOUNT FRIENDLY \* | UP TO 32 IP CAM | 3 YEARS WARRANTY



UP TO  
4MPFREE  
CMS

4K HDMI

UP TO  
8 HDDP2P  
SERVERUP TO  
32 IP3  
YEARS  
WARRANTY

TECHNICAL SHEET

# 32 CHANNEL DIGITAL VIDEO RECORDER

## ALL IN ONE (IP-TVI-CVI-AHD-960H)

### GSD-DVRFNC-32

<b>VIDEO COMPRESSION</b>	H.264	<b>"IP-RECORDING BANDWIDTH (MAX INPUT BANDWIDTH)"</b>	32MBPS
<b>VIDEO SYSTEM</b>	NTSC/PAL	<b>MAX OUTPUT BANDWIDTH</b>	128MBPS
<b>OPERATION SYSTEM</b>	LINUX(EMBEDDED)	<b>MAX DECODE PERFORMANCE</b>	1080P: 16CH REALTIME
<b>VIDEO-INPUT /OUTPUT</b>	32CH INPUTS / VGA AND HDMI OUTPUT	<b>RECORDING MODE</b>	CONTINUOUS/MANUAL/MOTION DETECT
<b>IP VIDEO INPUT</b>	8CH	<b>SYNCHRONOUS PLAYBACK</b>	16CH
<b>COMPOSITE VIDEO INPUT</b>	UP TO 40CH (ANALOG VIDEO + IP VIDEO)	<b>NETWORK TYPE</b>	LAN, DHCP, AND DDNS
<b>AUDIO INPUT /OUTPUT</b>	4CH INPUTS /1CH OUTPUT(RCA)	<b>HDD INTERFACE</b>	4SATA HDDS, UP TO 32TB
<b>DISPLAY</b>		<b>MULTIPLEX OPERATION</b>	LIVE DISPLAY, RECORD, PLAYBACK, BACKUP AND NETWORK
<b>RESOLUTION</b>	<b>ANALOG</b> : 3MP(18FPS) 1080P/720P/960H <b>IP</b> : 4MP/3MP1080P/720P	<b>USB</b>	2XUSB (FOR MOUSE AND BACKUP/UPGRADE)
<b>FEATURE</b>	1/4/6/8/9/10/13/14/16/17/19/22/25/32/36/49/S.E.Q.	<b>SENSOR &amp; ALARM I/O</b>	8CH INPUTS /1CH OUTPUT
<b>RECORD</b>		<b>PTZ CONTROL</b>	YES (RS485)
<b>RESOLUTION</b>	<b>ANALOG</b> : 3MP/1080P/720P/960H <b>IP</b> : 4MP/3MP1080P/720P	<b>MOBILE SURVEILLANCE</b>	SUPPORT IPHONE AND ANDROID OPERATION SYSTEM
<b>SPEED</b>	<b>ANALOG</b> : 3MP: 8FPS(EACH CH) 1080P: PAL:15FPS(EACH CH) 720P: PAL:25FPS/NTSC::30FPS(EACH CH) 960H: PAL:25FPS/NTSC::30PS(EACH CH) <b>IP</b> : PAL: 25FPS/NTSC: 30FPS(EACH CH)	<b>VGA/HDMI</b>	1024*768, 1280*1024, 1440*900, 1280*720, 1920*1080 , 1680*1050, 1600*1200, 1920*1200, 2560*1440 , 3840*2160
		<b>POWER SUPPLY</b>	DC 12V/5A
		<b>DIMENSION(WXDXH)</b>	378X326X66MM
		<b>WORKING TEMPERATURE</b>	-10°C~+55°C
		<b>WORKING HUMIDITY</b>	10%~90%

