




Security Tailored Your Way

Designed to grow with your needs, the system supports up to 160 connected devices. Easily add more sensors and accessories over time, including up to 6 keypads and 6 remotes.



Wireless Strobe Siren



Motion Sensor



Contact Sensor



Remote Controller




Vibration Sensor




Additional Keypad



Signal Repeater

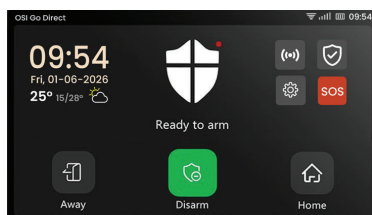

Default

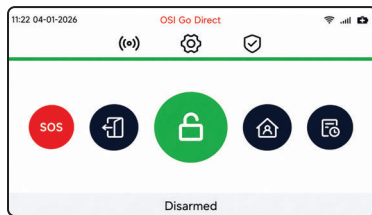

Modern

Two Visual Themes

Choose between the classic Default Style or the sleek, Modern Style. Both are available in Light Mode or Dark Mode to better match the aesthetic of your home or office.



Video Tutorials

Step-by-step videos to help you use your products.



Live Chat

Connect with our support team for real-time help.



Knowledge Base

Find helpful articles, guides, and answers to common questions.



Support Agent

peak with a support agent for personalized assistance.

Contact Us

www.osigodirect.com

sales@osigodirect.com

204.415-6234

OSI Go Direct



OSI Alarm System-Gen 2 | 4G

For Homes & Small Businesses



Elegance, Power & Security In one



Self-Monitor
No-Subscription



Professional
Monitoring



Ultra Sharp
HD Image



Setup
Wizard



Multiple User
Access Levels



Scaleable - Add
up to 160 Accs.



Free Continuous
Updates



Enhanced UI
User Experience



Anti-Fingerprint
display

OSI Go Direct

Keeping Homes & Businesses Safe

Full Features. Easy Installs. Low Cost.

The OSI Smart Alarm System Gen 2 (4G) features a fast, responsive interface, a vibrant 7-inch high-resolution IPS display with anti-fingerprint technology, and an upgraded UI for smooth, intuitive everyday operation.

Designed for residential homes, and small-businesses, our system delivers full-featured smart security at a low cost — with continuous updates, full warranty, and dedicated support.. Quick, wireless installation and an included app with no extra fees make it the easiest, most reliable solution for dealers and customers alike.



Offer Self-Monitoring

Give your customers a budget-friendly security option with **NO MONTHLY FEES!** Using the **FREE** app, they can control their alarm system and receive instant alerts—ideal for customers who prefer to manage their own security.



OR

24/7 Professional Monitoring


Offer your customers optional ULC Listed professional monitoring through **LANVAC** with fast, reliable response and added peace of mind.

LANVAC

- ULC Listed
- Tested with LANVAC Monitoring
- Ready for Dealer Deployment
- Fast, Reliable Alarm Communication
- Create Recurring Monitoring Revenue


23 User Accounts + 1 Admin

Supports 2 full-access admin accounts and up to 23 limited-access user accounts. Ideal for residential, modular, and small businesses.



3 day on-screen Weather forecast

Displays local weather information directly on the alarm panel, automatically updated through Wi-Fi based on the system's location.

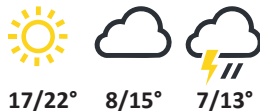

Free Continuous Updates


The OSI Smart Alarm System Gen 2 boasts free continuous updates, guaranteeing users access to new features, fixes, and improvements without extra charges. This ensures a cutting-edge, hassle-free experience, keeping the system up-to-date and highly efficient over time.



Technical Information

- Monitored or Self Monitored Option
- Two Visual Style Themes
- Setup Wizard
- 7" IPS Touch Screen
- Wi-Fi + 4G Cellular Connectivity
- Works with Alexa/Google assistant
- Long-lasting Sensor Batt. (5 yrs)
- Arm/Disarm via App/Remote
- Wireless Strobe Siren (plug-in)
- 3 Day on-screen Weather Forecast

- Add Up to 200 Accessories
- Built-in Siren
- Low Battery Alert
- 24-Hour Backup Battery
- 23 User Access Levels
- Desktop or Wall Mount
- Entry Sensor & Chime
- Free Continuous Updates
- SOS Feature: Ambulance, Fire, Police, or Police Silent Response

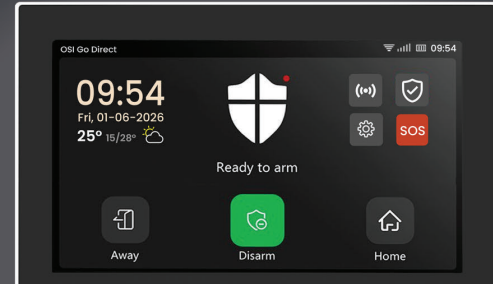

OSI Alarm System - Gen 2 | 4G

General

Input Power

DC12V 1A external cable
DC5V 2A Type-C USB

Built-in Battery

3.7V 5000mAh Lithium Battery
Lasts up to 24 Hours

Built-in Battery

3.7V 5000mAh Lithium Battery
Lasts up to 24 Hours

Working Power Consumption

5 Watts (W)

Working Temperature

-10°C to 50+°C

Working Temperature

-10°C to 50+°C

Display

Screen Size (Main Display)

7" Diagonal (6" W x 3.25" L)

Resolution (Main Display)

1024 x 600px IPS Anti-Fingerprint

Accessories

Wireless Strobe Siren (Qty 1)

Dimensions: 3.5" H x 3.5" W x 1.77" D
Power Type: AC100-240V (3.7V/500mAh Back-up)

Contact Sensor-Window/Door (Qty 5)

Dimensions: 2.7" H x .5" D x 1.18" W
Power Type: 2 x 2450 3V Lithium Coin Battery

Vibration Sensor (Not Included)

Dimensions: 2.5" H x 1.24" W x .64" D
Power Type: 12V DC Battery

PIR Motion Sensor (Qty 2)

Dimensions: 3.6" H x 1.96" W x 1.96" D
Power Type: 2 x AA Battery

Remote Controller (Qty 2)

Dimensions: 2.36" H x 1.18" W x .5" D
Power Type: 1 x CR2032 Lithium Coin Battery.

External Keypad w/2RFID Tags (Not Included)

Dimensions: 5.37" H x 3.4" W x .61" D
Power Type: DC5V 1.0A (3.7V/500mAh Back-up)

Connectivity

WiFi Standard

IEEE802.11b/g/n/ 2.4G band

4G Cellular

Supports LANVAC professional monitoring and SMS self-monitoring where Wi-Fi may be unavailable.

Radio Frequency

433MHz, eV1527

Dimensions

Dimensions (Display Panel)

7.20" W x 5.31" H x 0.7" D

Weight (Display Panel)

0.96 Lbs